



HSS PRECISIE VIERKANT DRUKFREZEN METRISCHE MATEN

HSS PRECISION STANDARD METRIC SQUARE BROACHES



A: vierkant mm
 B: toleranties mm
 C: frees afm. overhoeks mm
 D: geleide diameter mm
 E: boormaat mm
 F: drukfrees lengte mm
 G: minimale snijlengte mm
 H: maximale snijlengte mm
 K: benodigde persdruk Kgf

A: cutting size square mm
 B: tolerances mm
 C: diameter across corners mm
 D: pilot diameter mm
 E: drill size mm
 F: overall length mm
 G: minimum cutting length mm
 H: maximum cutting length mm
 K: pressure required Kgf

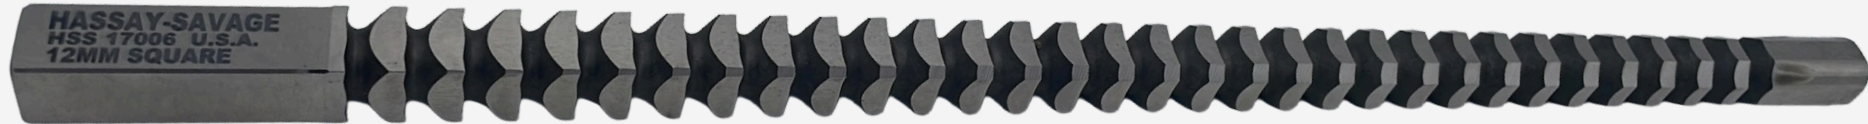

Code	A	B	C	D	E	F	G	H	K
17001	4	4,01-4,04	5,28-5,31	4,1	4,2	141,29	7,94	15,88	360
17002	5	5,01-5,04	6,72-6,74	5,2	5,2	174,63	9,53	19,05	550
17003	6	6,01-6,04	8,37-8,38	6,4	6,4	177,80	9,53	19,05	700
DU-66633	7	7,01-7,04		7,4	7,4				
17004	8	8,01-8,04	11,19-11,20	8,4	8,4	205,72	11,11	22,23	1200
DU-66639	9	9,01-9,04		9,4	9,4				
17005	10	10,01-10,04	13,8-13,83	10,4	10,4	276,23	12,70	25,40	1700
AIE150-0662	11	11,05							
17006	12	12,01-12,04	16,61-16,64	12,8	12,8	317,50	15,88	31,75	2600
17007	14	14,01-14,04	19,56-19,58	14,8	14,8	377,83	19,05	38,10	3000
17008	16	16,01-16,04	22,3-22,33	16,8	16,8	427,01	22,23	44,05	3200
AIE150-0663	17	17,05		18,5	18,5		22,23	44,05	3400
17009	18	18,01-18,04	25,10-25,12	19,6	19,6	469,90	22,23	44,05	3600
AIE150-0664	19	19,05							
17010	20	20,01-20,04	27,91-27,94	21,6	21,6	479,43	22,23	44,05	4000
17011	22	22,01-22,04	30,76-30,78	23,6	23,6	590,55	22,23	44,05	4800
17012	24	24,01-24,04	33,45-33,48	25,6	25,6	623,89	22,23	44,05	5200
17013	25	25,01-25,04	34,87-34,90	27	27	623,89	22,23	44,05	5600
AIE150-0252	27	27,01-27,04		30	30	711	25	50	6000
AIE150-0628	28								
AIE150-0646	29								
AIE150-0665	30								
AIE150-0619	32								
AIE150-0401	36								

IMPORTEUR:



Akkermans Industrial Engineering B.V.
 Vijfhuizenberg 103A • 4708AJ Roosendaal • Nederland
 T +31 (0)165 224140 • info@aiebv.com • www.aiebv.com

CATEGORIE : BROOTSSEN

MERK : HASSAY-SAVAGE

VERWANT : BS-410

GROEP : HS-170